


NEW!

EXTERNAL HEXAGON IMPLANT

e-fix[®]
IT-PROFILE_{TX}

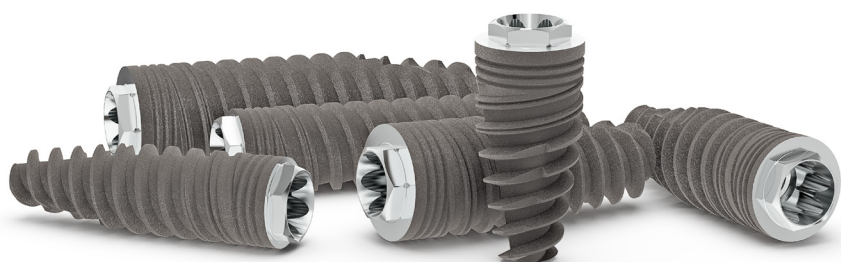

e-fix[®]


IT-PROFILE^{TX}

45
N.cm



INSTALLATION INTERFACE HEXALOBULAR

The new hexalobular installation interface **reduces the possibility of the driver locking** inside the implant, ensuring the integrity of the connection.




CERVICAL GROOVES + PLATFORM SWITCH

Cervical **Grooves** with roughness extended to the top of the implant, enable installation at **bone level*** and improve stress dissipation in the alveolar crest. Combined with the **Platform Switch[#]**, which guarantees **respect for the biological space**, they favor the maintenance of peri-implant tissues, optimizing aesthetics.




TAPERED PROFILE

The **conical core** with external cylindrical-conical profile of the threads facilitate the three-dimensional positioning of the implant, making it **ideal for immediate post-extraction installation** and in regions with anatomical limitations, such as maxillary concavity, convergence of roots and atrophic ridges.

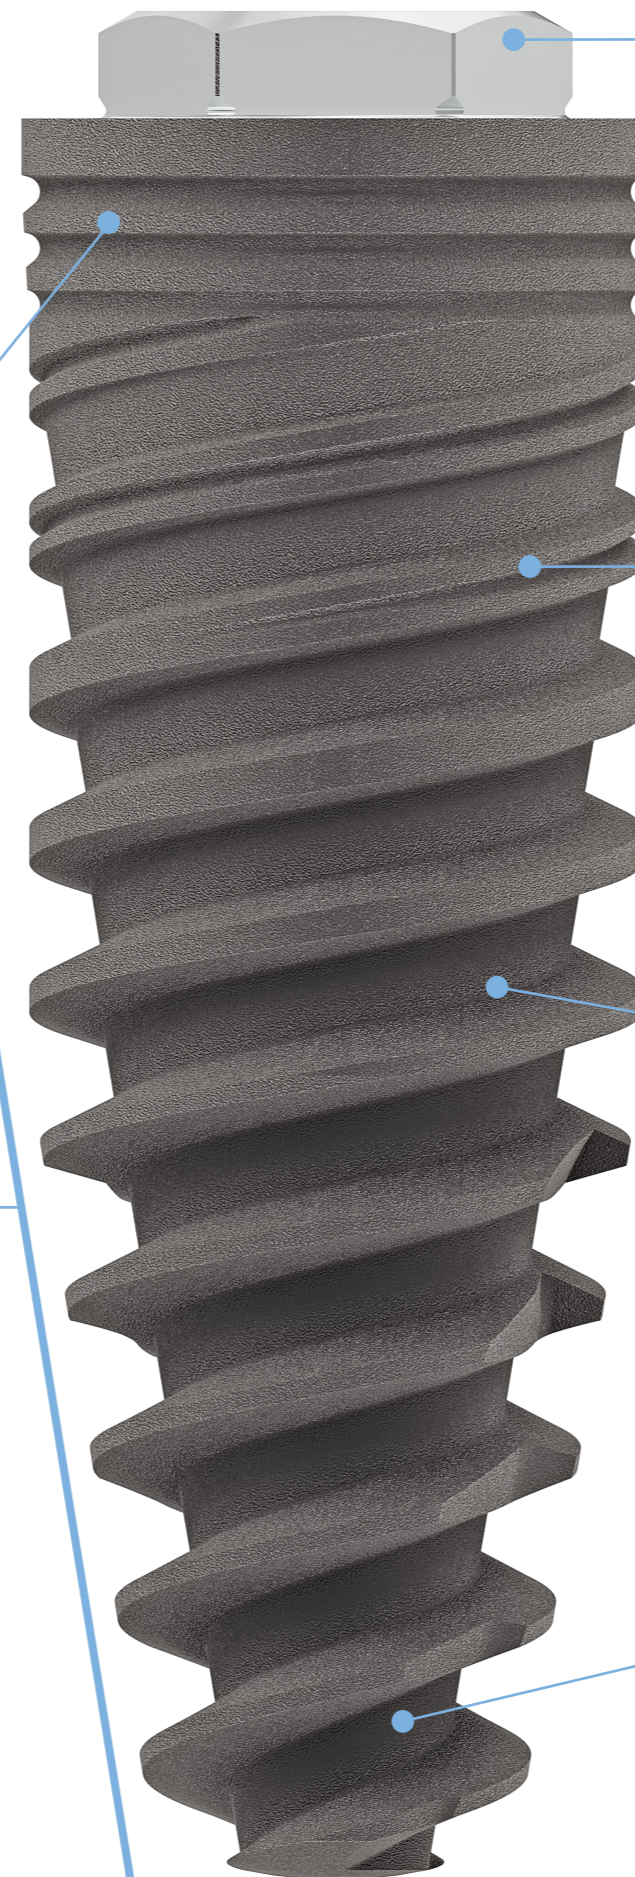

TITANIUMFIX[®] SURFACE


The surface of implants treated with sandblasting and acid attack is a pioneer in Brazil with **quality established** for over 25 years.



THREADS PROFILE


The progressive trapezoidal profile of the **Profile threads** confer bone compaction power in the final moments of installation, favoring primary stability and allowing immediate loading.

Check the use of the Cortical Drill for best results.



APEX WITH HIGH CUTTING POWER


















The reduced diameter of the **self-perforating apex** combined with **the cutting chambers** allow sub-instrumentation, enabling primary stability in medullary bones.




* The drilling protocol was developed based on the **bone-level** installation. For infraosseous installation, the drilling depth must be compensated by the professional.

Except on the Slim platform.

MODELS AND MEASUREMENTS

	8.5 mm	10 mm	11.5 mm	13 mm	15 mm
 Slim 3.5	 103.705	 103.701	 103.702	 103.703	 103.704
 Regular 4.0	 103.367	 103.363	 103.364	 103.365	 103.366
 Regular 4.5	 103.372	 103.368	 103.369	 103.370	 103.371

DRILLING PROTOCOL

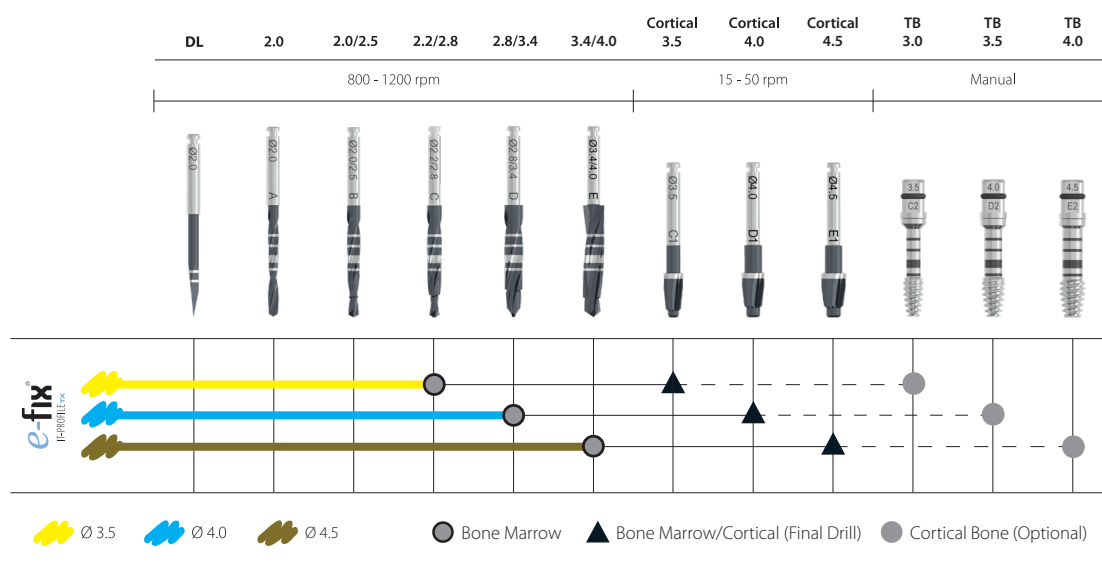



PROSTHETIC SOLUTIONS

ABUTMENT	Temporary Prosthesis	Screwed Prosthesis		Cemented Prosthesis		Overdenture
	Unitary Multiple	Unitary	Multiple	Unitary	Multiple	
	UCLA (Ti)	Link Universal* UCLA (PI and Base Co-Cr) Estheticone (Straight)	UCLA (PI and Base Co-Cr) Microunit (Straight, 17° and 30°) Estheticone (Straight, 17° and 30°)	Link Universal* Prepareable (Straight, 17° and 30°)* Ceraone# UCLA (PI and Base Co-Cr) Natural Profile* Straight# 15° and 30° Angled#	Prepareable (Straight, 17° and 30°)* UCLA (PI and Base Co-Cr) Natural Profile# Straight# 15° and 30° Angled#	O'ring#

* Abutments not available for narrow and wide platform | # Abutments not available for slim platform

PROSTHETIC COMPONENTS

SLIM PLATFORM

TRANSFER	ANALOG	ABUTMENT
<p>Open Tray Transfer</p> <p>201.627 Open</p> 	<p>201.705</p> 	<p>Prepareable</p> <p>401.024 4.0 x 1.0 mm</p> <p>401.025 4.0 x 2.0 mm</p> <p>401.026 4.0 x 3.0 mm</p> <p>401.027 4.0 x 4.0 mm</p> <p>17° Prepareable Angled</p> <p>401.019 4.0 x 1.0 mm</p> <p>401.020 4.0 x 2.0 mm</p> <p>401.021 4.0 x 3.0 mm</p> <p>30° Prepareable Angled</p> <p>401.022 4.0 x 1.0 mm</p> <p>401.023 4.0 x 2.0 mm</p> <p>Ucla Temporary (Titanium)</p> <p>401.122 Hex</p> <p>401.123 n/Hex</p> <p>Ucla Castable (Plastic)</p> <p>401.126 Hex</p> <p>401.127 n/Hex</p> <p>Ucla Castable (Base Co-Cr)</p> <p>401.124 Hex</p> <p>401.125 n/Hex</p>

ABUTMENT	TRANSFER SNAP-ON	ANALOG	COPING
<p>Link Universal</p> <p>401.909 3.6 x 1.5 mm - Short</p> <p>401.910 3.6 x 2.0 mm - Short</p> <p>401.911 3.6 x 3.0 mm - Short</p> <p>401.912 3.6 x 1.5 mm - Long</p> <p>401.913 3.6 x 2.0 mm - Long</p> <p>401.914 3.6 x 3.0 mm - Long</p>	<p>Closed Tray Transfer</p> <p>200.607 3.6 mm - Short</p> <p>200.606 3.6 mm - Long</p>	<p>200.718 3.6 mm - Short</p> <p>200.720 3.6 mm - Long</p>	<p>Provisional</p> <p>200.533 3.6 mm - Short</p> <p>200.534 3.6 mm - Long</p> <p>Plastic</p> <p>200.529 3.6 mm - Short</p> <p>200.530 3.6 mm - Long</p>

ABUTMENT	TRANSFER	ANALOG	COPING	HEALING CAP
<p>Microunit</p> <p>401.327 1.0 mm</p> <p>401.328 2.0 mm</p> <p>401.329 3.0 mm</p> <p>401.330 4.0 mm</p> <p>401.325 17° x 2.5 mm</p> <p>401.326 17° x 3.5 mm</p>	<p>Closed Tray Transfer</p> <p>AMUTC Closed</p> <p>Open Tray Transfer</p> <p>AMUTO Open</p>	<p>AMUNIN</p>	<p>AMUCT Titanium</p> <p>AMUCP Plastic</p> <p>200.504 Base Co-Cr</p>	<p>AMUAHC Titanium</p>

ABUTMENT	TRANSFER	ANALOG	COPING	HEALING CAP
<p>Estheticone</p> <p>401.223 1.0 mm</p> <p>401.224 2.0 mm</p> <p>401.225 3.0 mm</p> <p>401.221* 17° x 2.5 mm</p> <p>401.222* 17° x 3.5 mm</p>	<p>Closed Tray Transfer</p> <p>NAESTC Closed - n/Hex</p> <p>Open Tray Transfer</p> <p>NAESTH Open - Hex</p> <p>NAESTN Open - n/Hex</p>	<p>NAESNIH Hex</p> <p>NAESNIN n/Hex</p>	<p>Titanium</p> <p>200.516 Hex</p> <p>200.519 n/Hex</p> <p>Plastic</p> <p>NAESICH Hex</p> <p>NAESICN n/Hex</p> <p>Base Co-Cr</p> <p>200.506 Hex</p> <p>200.507 n/Hex</p>	<p>NAESAHC Titanium</p>

* The use of Estheticone Angled Abutments in conjunction with the copings with hexagon is contraindicated. Suitable only for multiple prosthesis.

COVER SCREW#




201.204

Part of **Titaniumfix®** implants


HEALING ABUTMENT

Straight



201.443 Ø 3.5 x 3.0 mm
201.444 Ø 3.5 x 4.0 mm
201.445 Ø 3.5 x 5.0 mm

Natural Profile



201.439 Ø 4.0 x 1.0 mm
201.440 Ø 4.0 x 2.0 mm
201.441 Ø 4.0 x 3.0 mm
201.442 Ø 4.0 x 4.0 mm

SCREW##

Prosthetic Screw for Abutment Link Universal



201.117 M2.0 x 0.4

Prosthetic Screw for Abutment



201.114 M2.0 x 0.4

Prosthetic Screw for Abutment Angled



201.115 M2.0 x 0.4

Prosthetic Screw for Coping



GPS M1.4 x 0.3

An integral part of **Titaniumfix®** abutments and copings



REGULAR PLATFORM

TRANSFER

Open Tray Transfer




ICO Open

Closed Tray Transfer



ICC Closed


ANALOG




201.707 Ø 4.1 mm
201.706 Ø 4.5 mm

ABUTMENT

Prepareable



401.033 5.0 x 1.0 mm
401.034 5.0 x 2.0 mm
401.035 5.0 x 3.0 mm
401.036 5.0 x 4.0 mm




401.042 6.0 x 1.0 mm
401.043 6.0 x 2.0 mm
401.044 6.0 x 3.0 mm
401.045 6.0 x 4.0 mm

17° Prepareable Angled



401.028 5.0 x 1.0 mm
401.029 5.0 x 2.0 mm
401.030 5.0 x 3.0 mm

30° Prepareable Angled



401.031 5.0 x 1.0 mm
401.032 5.0 x 2.0 mm

Ucla Temporary (Titanium)




AUHT Hex
AUNT n/Hex

Ucla Castable (Plastic)




AUHP Hex
AUNP n/Hex

Ucla Castable (Base Co-Cr)




AUHCR Hex
AUNCR n/Hex


Natural Profile



NA 5x1 Ø 5.0 x 1.0 mm
NA 5x2 Ø 5.0 x 2.0 mm
NA 5x3 Ø 5.0 x 3.0 mm
NA 5x4 Ø 5.0 x 4.0 mm



NA 6x1 Ø 6.0 x 1.0 mm
NA 6x2 Ø 6.0 x 2.0 mm
NA 6x3 Ø 6.0 x 3.0 mm
NA 6x4 Ø 6.0 x 4.0 mm




NA 7x1 Ø 7.0 x 1.0 mm
NA 7x2 Ø 7.0 x 2.0 mm
NA 7x3 Ø 7.0 x 3.0 mm
NA 7x4 Ø 7.0 x 4.0 mm

Straight




ARH

15° Angled




AA 15 5x1 Ø 5.0 x 1.0 mm
AA 15 5x2 Ø 5.0 x 2.0 mm
AA 15 6x1 Ø 6.0 x 1.0 mm
AA 15 6x2 Ø 6.0 x 2.0 mm

30° Angled




AA 30 5x1 Ø 5.0 x 1.0 mm
AA 30 5x2 Ø 5.0 x 2.0 mm
AA 30 6x1 Ø 6.0 x 1.0 mm
AA 30 6x2 Ø 6.0 x 2.0 mm

O'ring




AOR 2.0 2.0 mm
AOR 3.0 3.0 mm
AOR 4.0 4.0 mm
AOR 5.0 5.0 mm
AOR 6.0 6.0 mm



AOR-F Female
AOR-E Spacer
AOR-A Rubber
AOR-P Plastic Cap

ABUTMENT

Link Universal



401.901 4.5 x 1.0 mm - Short
401.902 4.5 x 2.0 mm - Short
401.903 4.5 x 3.0 mm - Short
401.904 4.5 x 4.0 mm - Short
401.905 4.5 x 1.0 mm - Long
401.906 4.5 x 2.0 mm - Long
401.907 4.5 x 3.0 mm - Long
401.908 4.5 x 4.0 mm - Long


TRANSFER SNAP-ON

Closed Tray Transfer



200.609 4.5 mm - Short
200.608 4.5 mm - Long

ANALOG



200.719 4.5 mm - Short
200.721 4.5 mm - Long

COPING

Provisional



200.535 4.5 mm - Short
200.536 4.5 mm - Long

Plastic



200.531 4.5 mm - Short
200.532 4.5 mm - Long

ABUTMENT	TRANSFER	ANALOG	COPING	HEALING CAP
Ceraone ACO 1.0 1.0 mm ACO 2.0 2.0 mm ACO 3.0 3.0 mm	Closed Tray Transfer ACOT Closed	ACONIH	ACOC Plastic	ACOHC Plastic

ABUTMENT	TRANSFER	ANALOG	COPING	HEALING CAP
Microunit AMU 1.0 1.0 mm AMU 2.0 2.0 mm AMU 3.0 3.0 mm AMU 4.0 4.0 mm AMU 17x2 17° x 2.5 mm AMU 17x3 17° x 3.5 mm AMU 30x3 30° x 3.0 mm AMU 30x4 30° x 4.0 mm	Closed Tray Transfer AMUTC Closed Open Tray Transfer AMUTO Open	AMUNIN	AMUCT Titanium AMUCP Plastic 200.504 Base Co-Cr	AMUAHC Titanium

ABUTMENT	TRANSFER	ANALOG	COPING	HEALING CAP
Estheticone AES 1.0 1.0 mm AES 2.0 2.0 mm AES 3.0 3.0 mm AES 17x2* 17° x 2.0 mm AES 17x3* 17° x 3.0 mm AES 30x3* 30° x 3.0 mm AES 30x4* 30° x 4.0 mm	Closed Tray Transfer AESTC Closed - n/ Hex Open Tray Transfer AESTH Open - Hex AESTN Open - n/ Hex	AESNIH Hex AESNIN n/ Hex	Titanium 200.515 Hex 200.518 n/ Hex Plastic AESICH Hex AESICN n/ Hex Base Co-Cr 200.508 Hex 200.509 n/ Hex	AESAHC Titanium

* The use of Estheticone Angled Abutments in conjunction with the copings with hexagon is contraindicated. Suitable only for multiple prosthesis.


COVER SCREW#
201.206 Ø 4.5 mm # Part of Titaniumfix® implants

HEALING ABUTMENT	
Straight CHR 43 Ø 4.1 x 3.0 mm CHR 44 Ø 4.1 x 4.0 mm CHR 45 Ø 4.1 x 5.0 mm Standard SPH 3 Ø 4.5 x 3.0 mm SPH 4 Ø 4.5 x 4.0 mm SPH 5 Ø 4.5 x 5.0 mm SPH 7 Ø 4.5 x 7.0 mm	Natural Profile NH 5x1 Ø 5.0 x 1.0 mm NH 5x2 Ø 5.0 x 2.0 mm NH 5x3 Ø 5.0 x 3.0 mm NH 5x4 Ø 5.0 x 4.0 mm NH 6x1 Ø 6.0 x 1.0 mm NH 6x2 Ø 6.0 x 2.0 mm NH 6x3 Ø 6.0 x 3.0 mm NH 6x4 Ø 6.0 x 4.0 mm NH 7x1 Ø 7.0 x 1.0 mm NH 7x2 Ø 7.0 x 2.0 mm NH 7x3 Ø 7.0 x 3.0 mm NH 7x4 Ø 7.0 x 4.0 mm

SCREW##
Prosthetic Screw for Abutment NPS M2.0 x 0.4 NPSS M2.0 x 0.4 Prosthetic Screw for Abutment Prepareable 201.114 M2.0 x 0.4 Prosthetic Screw for Abutment Prepareable Angled 201.115 M2.0 x 0.4 Prosthetic Screw for Abutment Angled 201.112 M2.0 x 0.4 Prosthetic Screw for Link Universal Abutment 201.116 M2.0 x 0.4 Prosthetic Screw for Coping GPS M1.4 x 0.3

An integral part of Titaniumfix® abutments and copings

HEXALOBULAR WRENCH **NEW!**

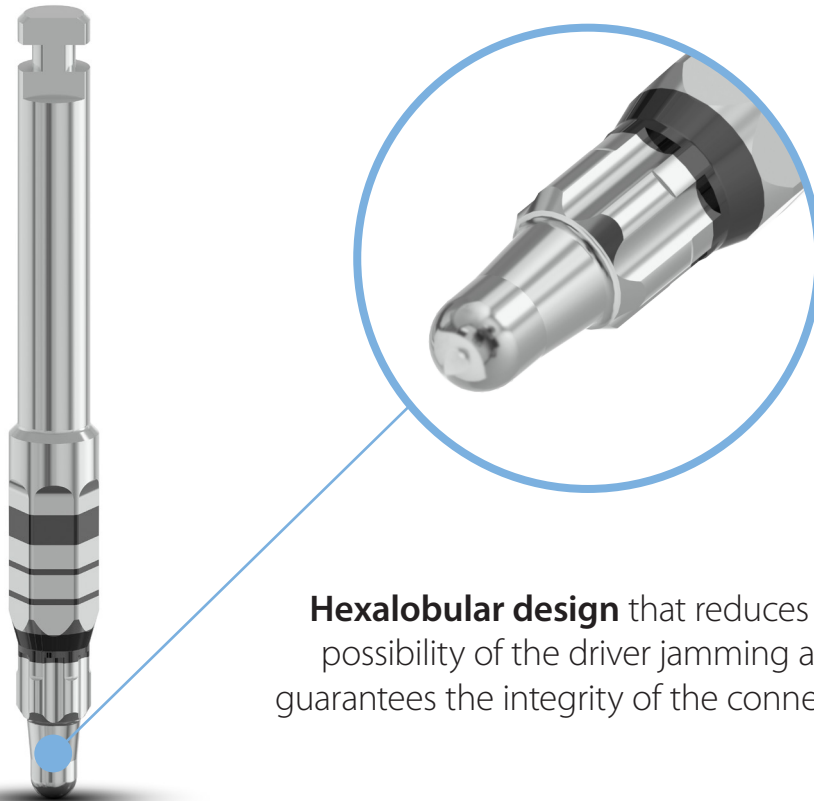


Hexalobular design that reduces the possibility of the driver jamming and guarantees the integrity of the connection.

Indexing positioning is performed during implant installation with the **millimeter installation driver**, which also facilitates checking the installation level and transmucosal height.

PROFILE SURGICAL KIT

705.271 e-fix Profile Surgical Kit 3.5/4.0/4.5

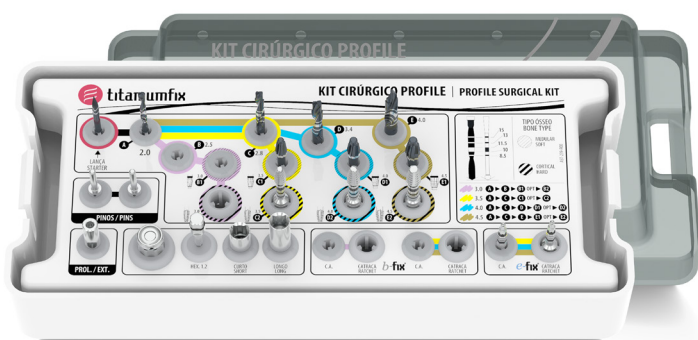

Products are subject to change without notice and images contained in this document are not necessarily to scale. Some products may not be regulated/cleared/licensed in all markets. Please contact your sales representative to check availability. For detailed information on indications, contraindications, warnings and precautions, consult the instructions for use of the products available on our website.



A.S. Technology Componentes Especiais Ltda
Rua Profª Ana Isabel Barbosa, 207 - Jd. Diamante
12223-180 - São José dos Campos - SP - Brasil

+55 12 3929 5504 | 0800 773 7030

MK300094 REV 00 | 2022-09-01



www.titaniumfix.com.br